


Pressurized Remote Access Kits



- ✓ **Fast:** sample multiple ports from one location without shutting down.
- ✓ **Safe:** sample without climbing or crawling into tight or dangerous spaces.
- ✓ **Reliable:** rugged wire braided & high pressure micro hoses offer minimum purge volumes.
- ✓ **Ready made kits & mounting hardware** available from stock.

How To Order:

A1	Select Valve: _____
A2	Bulkhead: _____
B1	Select Hose: _____
B2	End Style: _____
B3	Length: _____
C	Port Thread & End Style: _____
D	Accessories: _____ (Order Separately)

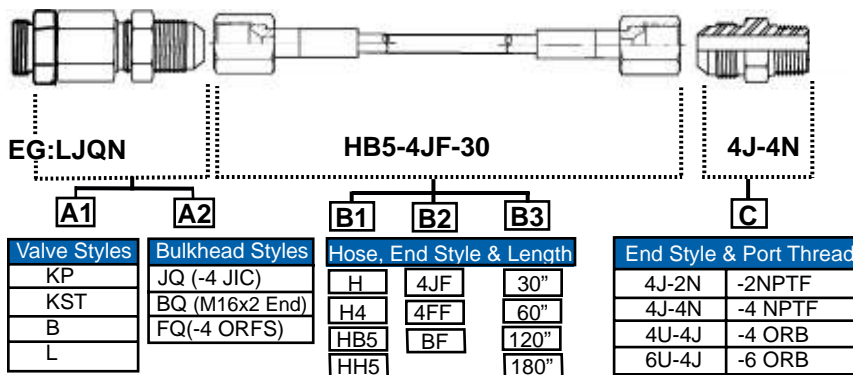

A wide variety of other sizes including metric are also available

A Valve Specifications

	KP	KST	B	L
Max. Sampling Pressure	750 psi	750 psi (3500psi VHKF)	750 psi (6000psi VHBf)	Vacuum to 150psi
Seal FKM (Viton™)	-15°F to 400°F (-26°C to 204°C)	-15°F to 400°F (-26°C to 204°C)	-15°F to 400°F (-26°C to 204°C)	-15°F to 400°F (-26°C to 204°C)
Seal Nitrile (Buna-N)	-40°F to 240°F (-40°C to 115°C)	-40°F to 240°F (-40°C to 115°C)	-40°F to 240°F (-40°C to 115°C)	-40°F to 240°F (-40°C to 115°C)

Valve Materials

Component	KP	KST	B	L
Body	Steel/Brass	Steel	Steel	Steel
Plating	Zinc Dichr	Zinc Dichr	Zinc Dichr.	Zinc Dichr
Seals	NBR (Nitrile)	NBR(Nitrile)	NBR(Nitrile)	FKM (Viton)
Valve Sealing	O-Ring	O-Ring	Ball (stainless)	O-Ring
Spring	Steel	Steel	Steel	Steel

Check with Checkfluid for approximate purge volumes and sampling times

B Hose Specifications

	Aramid Braided		Wire Braided	
	H	H4	HH5	HB5 (Blue)
I.D.	.079"/ 2mm	.0157"/4mm	.187"/ 4.75 mm	.187"/ 4.75 mm
O.D.	.196"/ 5mm	.314"/ 8mm	.53"/ 13.5 mm	.52"/ 13.2 mm
Min Bend Radius	.787"/20mm	1.57"/40mm	3.5"/ 88.9 mm	3.0"/ 76.2 mm
Operating Pressure	4710psi	4240psi	5000psi	3000 psi
Temperature	-40°C to 100°C -40°F to 212°F	-40°C to 100°C -40°F to 212°F	-40°C to 121°C -40F to 250°F	-54°C to 149°C -65F to 300°F
Tube	Polyamid	Polyamid	Nitrile (NBR)	Nitrile (NBR)
Braid	Aramid	Aramid	Double Braided	Single Braid
Cover	Polyamid	Polyamid	Neoprene(CR)	Neoprene(CR)
			MSHA ; DOT approved	DOT approved

Probes & Accessories

Part #	Description
VHBF	B Series thread-on microhose & vent cap
VHKF	K Series thread-on microhose probe & vent cap
SVP	K series probe, tube & vent cap (disposable)
SER4-100	LDPE Tubing, 1/4" OD
RAB003-4J	Remote Access Mounting Bracket -4 Port JIC Male



sales@checkfluid.com
www.checkfluid.com

Checkfluid Inc.
Toll Free: 1-866-652-8728
Fax: 519-652-0392